




Proximity Sensor Hi Power Tester DKMU2 Teach

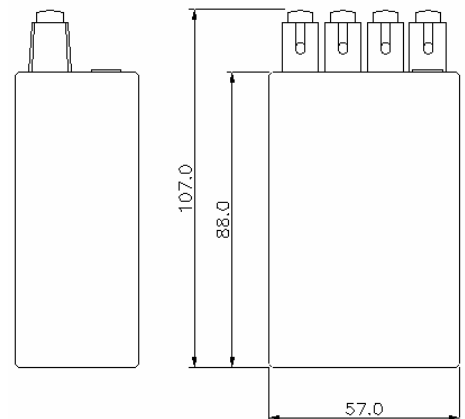

Part Number	DKMU24 TEACH
Voltage supply to sensor	24V continuous voltage power supply
Max continuous supply current	100mA
Buzzer output	Yes
Battery supply	6 x 1.5V AA not supplied
Connection	4 spring terminals
Housing Material	High density polystyrene
Teach button	Yes ⁽¹⁾
Anti voltage trail-off power supply	Yes
Operating Temperature	-35 to +70°C
	1) Teach function for sensors with PNP type 4th wire teach
Notes:	<p>This unit will test all the sensors tested by the DKMU2DC & DKMU24DC but also has an extra terminal and button to program 4th wire PNP teach sensors.</p> <p>3 wire connection: Brown wire = + positive terminal Blue wire = - negative terminal Black/White wire = switch terminal</p> <p>2 wire connection: + sensor wire = + positive terminal - sensor wire = switch terminal Note: The PNP light will activate</p> <p>4 wire connection: See manufacturers wiring instructions</p>



Drawing dimensions in millimeters

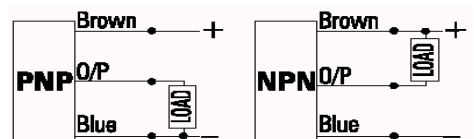

Electromagnetic compatibility	Radiated electromagnetic field immunity to IEC61000-4-3
	Electrostatic discharge (ESD) immunity to IEC61000-4-2
	Emission limits to CISPR11



**American
Electronic
Components, Inc.**

© American Electronic Components Inc 2007

American Electronic Components Inc.,
 1101 Lafayette Street, Elkhart, Indiana. USA
 Tel: +1-574-295-6330 Fax: +1-574-293-8013
 Email: sales@aecsensors.com
<http://www.aecsensors.com>